




MODEL EK2

TECHNICAL SPECIFICATIONS

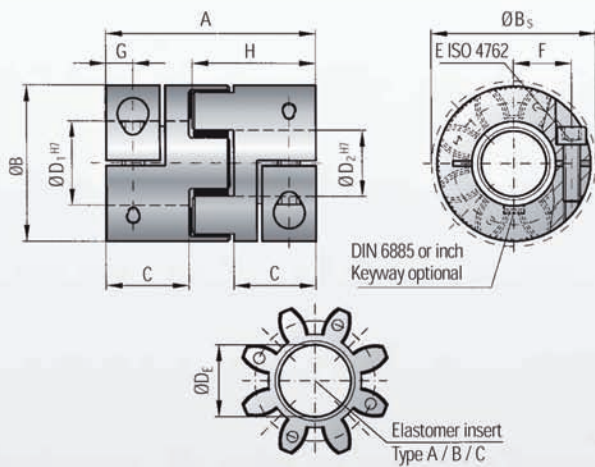

Properties:

- easy assembly
- concentrically machined hubs
- vibration dampening
- electrically insulating
- backlash-free
- press-fit design

Material:

Clamping hub: up to series 450 high strength aluminum, from series 800 and up steel
Elastomer insert: precision molded, wear resistant, and thermally stable polymer

Design:

Two coupling hubs are concentrically machined with concave driving jaws

*Speeds:

Over 10.000 rpm a finely balanced version is available

Tolerance:

On the hub/shaft connection 0,01 to 0,05 mm



Model EK 2	Series																	
	20			60			150			300			450			800		
Type (Elastomer insert)	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C
Rated torque (Nm) T_{KN}	17	21	6	60	75	20	160	200	42	325	405	84	530	660	95	950	1100	240
Max. torque** (Nm) T_{Kmax}	34	42	12	120	150	35	320	400	85	650	810	170	1060	1350	190	1900	2150	400
Overall length (mm) A	66			78			90			114			126			162		
Outer diameter (mm) B	42			56			66.5			82			102			136.5		
Outer diameter with screwhead (mm) B_5	44.5			57			68			85			105			139		
Mounting length (mm) C	25			30			35			45			50			65		
Inner diameter range H7 (mm) $D_{1/2}$	8 - 25			12 - 32			19 - 36			20 - 45			28 - 60			35 - 80		
Inner diameter max. (elastomer) (mm) D_f	19.2			27.2			30.2			38.2			46.2			60.5		
Mounting screw (ISO 4762/12.9)	M5			M6			M8			M10			M12			M16		
Tightening torque of the mounting screw (Nm) E	8			15			35			70			120			290		
Distance between centers (mm) F	15.5			21			24			29			38			50.5		
Distance (mm) G	8.5			10			12			15			17.5			23		
Hub length (mm) H	39			46			52.5			66			73			93.5		
Moment of inertia (10^{-3} kgm^2) J/J_2	0.02			0.09			0.2			0.6			1.5			9.5		
Approx. weight (kg)	0.15			0.35			0.6			1.1			1.7			10		
Speed* (rpm)	19.000			14.000			11.500			9.500			8.000			4.000		

1 Nm = 8.85 in lbs

** Maximum transferable torque of the clamping hub depends on the bore diameters

Series	Ø 8	Ø 16	Ø 19	Ø 25	Ø 30	Ø 32	Ø 35	Ø 45	Ø 50	Ø 55	Ø 60	Ø 65	Ø 70	Ø 75	Ø 80
20															
60															
150															
300															
450															
800															

Higher torque through additional key possible.

Ordering example

EK2 / 60 / A / 19 / 24 / XX

Model	_____
Series	_____
Type Elastomer insert	_____
Bore Ø D1 H7	_____
Bore Ø D2 H7	_____
Non standard e.g. finely balanced	_____


All data is subject to change without notice.

Areas of application:

- Servo drives
- Machine tools
- Packaging machinery
- Plant automation
- Printing machinery
- Industrial robots
- Measurement and positioning units
- general mechanical engineering
- Linking screw jacks, linear actuators, encoders

Properties of the product range:

- vibration dampening
- electrically insulating (standard)
- backlash-free
- press-fit design
- compensation of lateral-, angular- and axial misalignment

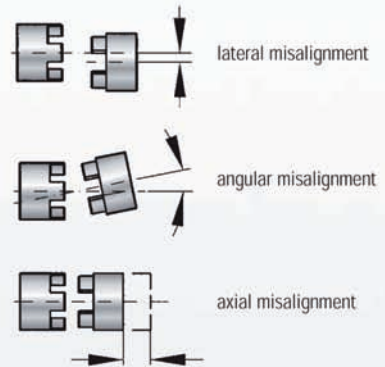

Function

The equalizing element of an EK coupling is the elastomer insert. It transmits the torque without backlash and vibration. The elastomer insert defines the features of the entire coupling and/or of the entire drive system.

The coupling is backlash free due to pretensioning of the elastomer insert between the two coupling halves. The Servomax-Coupling compensates for lateral, angular and axial misalignment.



Type A
Shore hardness 98 Sh A



Type B
Shore hardness 64 Sh D



Type C
Shore hardness 80 Sh A



Type D*
Shore hardness 92 Sh A

Specification of the Elastomer inserts

Type	Shore hardness	Color	Material	Relative damping (ψ)	Temperature range	Features
A	98 Sh A	red	TPU	0,4 - 0,5	-30°C to +100°C	high damping
B	64 Sh D	green	TPU	0,3 - 0,45	-30°C to +120°C	high torsional stiffness
C	80 Sh A	yellow	TPU	0,3 - 0,4	-30°C to +100°C	very high damping
D*	92 Sh A	black	TPU	0,3 - 0,45	-10°C to +70°C	electrically conductive*

* Due to the electrically conductive properties of the insert electrostatic load of the coupling is prevented. This eliminates sparks during normal operation (Explosive areas). Technical datas available.

The values of the relative damping were determined at 10 Hz and +20°C.

Model row EK	Series																										
	2			5			10			20			60			150			300			450			800		
Type (Elastomer insert)	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C
Static torsional stiffness (Nm/rad) C_T	50	115	17	150	350	53	260	600	90	1140	2500	520	3290	9750	1400	4970	10600	1130	12400	18000	1280	15100	27000	4120	41300	66080	10320
Dynamic torsional stiffness (Nm/rad) C_{Tdyn}	100	230	35	300	700	106	541	1650	224	2540	4440	876	7940	11900	1350	13400	29300	3590	23700	40400	6090	55400	81200	11600	82600	180150	28600
Lateral (mm) Max. values	0,08	0,06	0,1	0,08	0,06	0,1	0,1	0,08	0,12	0,1	0,08	0,15	0,12	0,1	0,15	0,15	0,12	0,2	0,18	0,14	0,25	0,2	0,18	0,25	0,25	0,2	0,3
Angular (degree) Max. values	1	0,8	1,2	1	0,8	1,2	1	0,8	1,2	1	0,8	1,2	1	0,8	1,2	1	0,8	1,2	1	0,8	1,2	1	0,8	1,2	1	0,8	1,2
Axial (mm) Max. values	±1			±1			±1			±2			±2			±2			±2			±2			±2		

Static torsional stiffness at 50% T_{KN}

Dynamic torsional stiffness at T_{KN}

1 Nm = 8,85 in lbs.